

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) EP 1 184 973 A1

(12) EUROPEAN PATENT APPLICATION

(43) Date of publication:
06.03.2002 Bulletin 2002/10

(51) Int Cl.7: H03F 3/217, H03F 1/30

(21) Application number: 00830589.8

(22) Date of filing: 29.08.2000

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(72) Inventors:
• Botti, Edoardo
27029 Vigevano (PV) (IT)
• Grosso, Antonio
20139 Milano (IT)

(71) Applicant: STMicroelectronics S.r.l.
20041 Agrate Brianza (Milano) (IT)

(74) Representative: Mittler, Enrico
c/o Mittler & C. s.r.l., Viale Lombardia, 20
20131 Milano (IT)

(54) Power amplification equipment

(57) A power amplification apparatus receiving in input an enable signal (En) and an input square wave signal (C) is described. The apparatus comprises a device (6) receiving the input square wave signal (C) and the enable signal (En) and which produces a new enable signal (Ens) of the apparatus which is synchronized with

a rise or down front of the input square wave signal (C), so that an output square wave signal (Vo) of the apparatus, which is normally shifted of a certain period fraction with respect to the square wave signal (C) in input to the apparatus, has the first (Ti) and the last (Tf) pulses which have a duration equal to a period fraction of the output square wave signal (Vo).

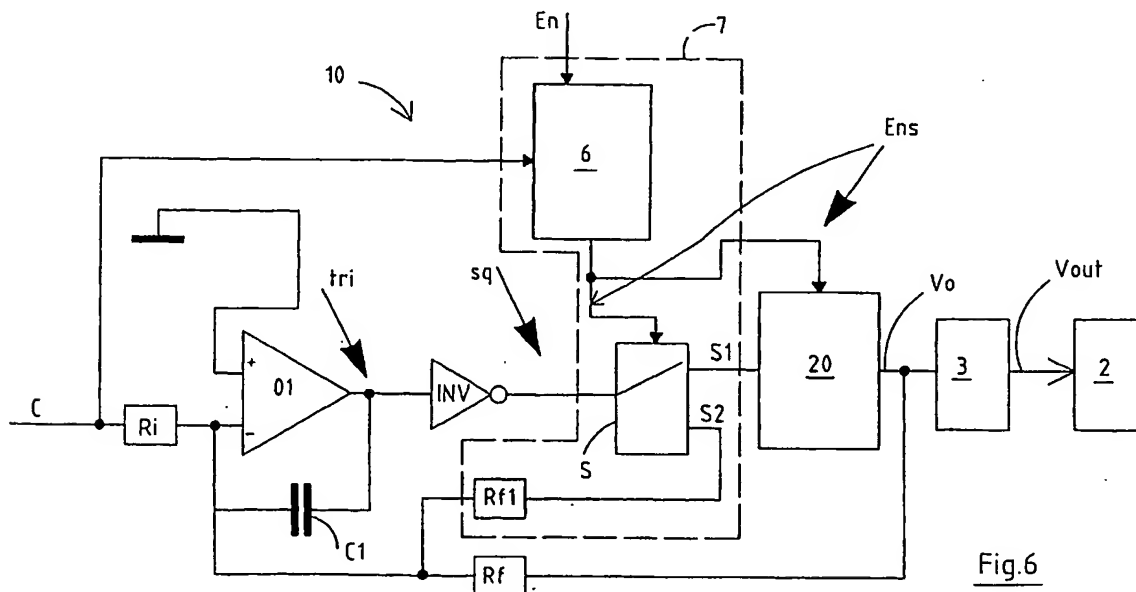


Fig.6

Description

[0001] The present invention relates to a power amplification apparatus, particularly to an apparatus for amplifying audio signals.

[0002] The typical tendency to the reduction of the power consumption and of the weights and encumbrances of the heat dissipators has induced to require power audio amplifiers with a higher efficiency than the class-AB amplifiers from the apparatus constructors.

[0003] Class-D audio amplifiers have been proposed for satisfying such request, which comprise a DC-AC converter producing a pulse width modulated output signal (PWM); such signal in turn drives power switches driving a load provided with a passive filter for restoring the amplified audio signal.

[0004] A single output amplifier with analog input and PWM output (class-D amplifier) is described in the article "Analysis of a quality class-D amplifier", F.A. Himmelstoss, et al., I.E.E. Transactions on Consumer Electronics, Vol. 42, No. 3, August 1996.

[0005] The more and more wide interest toward the digital processing of the signals has induced to provide power amplifiers with analog or digital input.

[0006] A particular class of such power amplifier is that of the audio switching amplifiers wherein the output of the power PWM block amplifier 1 is separated from a load 2 (generally a loudspeaker) by means of a LC low-pass filter 3, as shown in Figure 1. When the amplifier is turned on by means of the signal En, in absence of input audio signal, the voltage signal detected before the LC filter 3 is a square wave with a duty-cycle of 50%, that is the square wave signal of the modulator PWM which has been amplified. The voltage signal Vout which is in output from the LC filter 3, which in running state has a waveform schematically formed by a triangular wave with a void middle value, in the period T_i following the turning on has a non-void middle value which causes a noise audible to the loudspeaker, as shown in Figure 2. An equal result is achieved during the turning off of the amplifier, in the period T_f . The wideness of such noise also is not constant but it depends on the instant of application of the turning on signal.

[0007] A solution actually used for eliminating such noises is to interpose between the LC low-pass filter 3 and the loudspeaker a relay 4 suitably driven by means of a signal Enrelais which is activated after a certain time period T_{on} from the turning on and is deactivated at a time T_{off} before the turning off of the device, so that the loudspeaker is excluded in the periods interested from the transient, as shown in Figures 3 and 4.

[0008] In view of the state of the art described, it is an object of the present invention to provide a power amplification apparatus which reduces the noises due to the turning on and turning off transients of the amplifier in a economic way.

[0009] According to the present invention, such object is attained by a power amplification apparatus receiving

in input an enable signal and an input square wave signal, characterized by comprising a device which receives said input square wave signal and said enable signal and which produces a new enable signal for said apparatus which is synchronized with a rise or down front of the input square wave signal, so that an output square wave signal of said apparatus, which is normally shifted of a certain period fraction with respect to the square wave signal in input to the apparatus, has the first and the last pulses which have a duration equal to a period fraction of said output square wave signal.

[0010] The features and the advantages of the present invention will be made evident by the following detailed description of an embodiment thereof, illustrated as not limiting example in the annexed drawings, wherein:

Figure 1 is a block diagram of an audio amplifier according to prior art;

Figure 2 shows some operation waveforms of the amplifier of Figure 1;

Figure 3 is a block diagram of an audio amplifier with a device for eliminating the turning on and turning off transients according to prior art;

Figure 4 shows some operation waveforms of the amplifier of Figure 3;

Figure 5 is a block diagram of a PWM amplification apparatus with a device for eliminating the turning on and turning off transients according to present invention;

Figure 6 is a circuit scheme of the apparatus of Figure 5;

Figure 7 shows the operation waveforms of the apparatus of Figure 6;

Figure 8 is a circuit scheme of the device for eliminating the turning on and turning off transients of Figure 6.

[0011] In Figure 1 is shown the block diagram of a typical audio switching amplifier wherein the output of the PWM power amplification block 1 is separated from a load 2 (generally a loudspeaker) by means of a LC low-pass filter 3. When the amplifier is turned on by means of the signal En, in absence of input audio signal, the voltage signal detected before the LC filter 3 is a square wave with a duty-cycle of 50%, that is the square wave signal of the modulator PWM which was amplified. The voltage signal Vout which is in output from the LC filter 3, which in running state has a waveform shown by means of a triangular wave with a void middle value, in the period T_i following the turning on has a non-void middle value which causes a noise audible at the loudspeaker, as shown in Figure 2. An equal result is achieved during the turning off of the amplifier, in the period T_f .

[0012] In Figure 3 the block diagram of the audio switching amplifier of Figure 1 is shown which has a known device for eliminating the transients, that is a re-

lay 4 placed between the LC low-pass filter 3 and the loudspeaker. The relay 4 is suitably driven by means of a signal Enrelais which is activated after a certain time period Ton from the turning on and is deactivated at a time Toff before the turning off of the device, so that the loudspeaker is excluded in the periods interested by the transient, as shown in Figure 4.

[0013] In Figure 5 the block diagram of an amplification apparatus according to present invention is shown. Such amplification apparatus comprises a signal amplification block 10 which in turn comprises a power amplification block 5 of the pulse width modulation type (PWM) and a block 7; such block 10 receives in input, in absence of an input audio signal, an input square wave signal C having a duty-cycle of 50% and an enable signal En (a signal causing the turning on and turning off of the amplifier). In the case wherein the input audio signal is a digital signal such square wave signal C is a PWM signal having a duty-cycle of 50% in the steps of turning on and turning off of the device (the modulating PWM signal which derives from a PWM modulation chain not shown in Figures), if instead the input audio signal is an analog signal, the square wave signal C is a clock signal having a duty-cycle of 50%, which is produced for example by an oscillator. The output PWM signal from the block 10 goes in input to the block 3 constituted by the LC filter the output of which drives the load 2.

[0014] In Figure 6 is shown a circuit implementation of the amplification apparatus of Figure 5. The block 5 comprises an integrator stage constituted by an operational amplifier O1, a capacitor C1 connected between the inverting input (-) of the operational amplifier O1 and the output thereof, a resistance Ri connected to the inverting input of the operational amplifier O1 and which has a free terminal to which the input signal C is applied. The non-inverting terminal of the operational amplifier O1 is connected to ground or to a reference voltage.

[0015] A triangular signal tri shown in Figure 7 is in output to the integrator stage. The triangular signal tri is squared by the logical block INV which can be a simple NOT logical gate, or an inverter or a cascade of NOT logical gates at the output of which a logical pulse width modulation signal sq is obtained which is a square wave shifted of 1/4 of a cycle with respect to that in input.

[0016] The signal sq is sent in input to a switch S having two output terminals S1 and S2 the first of which is connected to a power output stage 20 and the second of which is connected to a resistance Rf1 having its other terminal connected to the inverting input of the operational amplifier O1. The current flowing in the resistances Ri and Rf1 must be lower than the current flowing in the resistance Ri so that the amplification apparatus operates correctly, how it is supposed in the description of the operation of the apparatus.

[0017] The switch S is controlled by a signal Ens in output from a device 6 which with the same switch S and with the resistance Rf1 forms the block 7 of the am-

plifier of Figure 5.

[0018] The device 6 receives in input the signals C and En and it produces in output the signal Ens which is the signal En coincident with a rise or down front of the input signal C. The signal Ens causes the switch S to be disposed on the terminal S1 and it causes the output signal Vo of the power stage 20 to have the first pulse Ti after its enabling and the last pulse Tf before its disabling with a duration equal to 1/4 of its period; this reduces the amplitude of the audible transient of the output signal Vo.

[0019] When the signal Ens is low the switch S is disposed at the terminal S2 that is at a terminal of the resistance Rf1 so that during the non-operation period of the power stage 20 the integrator stage does not diverge carrying itself out of the linearity state.

[0020] The device 6 can be constituted for example by a set-reset edge-triggered flip-flop of the type shown in Figure 8. The input signal C and the inverted signal C are in input to a AND gate A1 the output signal of which is in input to two NAND gates N1 and N2. The enable signal En is sent to the other input of the NAND gate N1 while the other input of the NAND gate N2 is to ground. The output signals of the NAND gates N1 and N2 are sent to two other NAND gates N3 and N4 which have in input respectively the signals Ens (which is the inverted signal Ens) and Ens. How already mentioned, the time waveform of the signal Ens is shown in Figure 7.

Claims

1. Power amplification apparatus receiving in input an enable signal (En) and an input square wave signal (C), **characterized by** comprising a device (6) receiving said input square wave signal (C) and said enable signal (En) and which produces a new enable signal (Ens) for said apparatus which is synchronized with a rise or down front of the input square wave signal (C), so that an output square wave signal (Vo) of said apparatus, which is normally shifted of a certain period fraction with respect to the square wave signal (C) in input to the apparatus, has the first (Ti) and the last (Tf) pulses which have a duration equal to a period fraction of said output square wave signal (Vo).
2. Apparatus according to claim 1, **characterized in that** the duration of said first (Ti) and last (Tf) pulse of said square wave signal (Vo) in output from said amplification apparatus is of 1/4 of said period of said square wave output signal (Vo).
3. Apparatus according to claim 1, **characterized in that** said power amplification apparatus is a power PWM apparatus.
4. Apparatus according to claim 1, **characterized in**



that said device (6) is a flip-flop of the type set-reset edge-triggered.

5. Apparatus according to claim 3, **characterized by** comprising a first amplification stage (O1, C1, Ri, INV) and a second amplification stage (20), said first amplification stage (O1, C1, Ri, INV) comprising an integrator stage (O1, C1, Ri) having said input square wave signal (C) in input to the inverting node, a square stage (INV) of the output signal (tri) of said integrator stage (O1, C1, Ri), said first amplification stage (O1, C1, Ri, INV) being disposed in series to said second amplification stage (20) and the output of said second amplification stage (20) being connected to a terminal of a resistor (Rf) which has the other terminal connected to the inverting node of said integrator stage (O1, C1, Ri).
5
10
15
6. Apparatus according to claim 5, **characterized by** comprising a switch (S) interposed between said square stage (INV) and said second amplification stage (20), said switch (S) being controlled by said new enable signal (Ens) produced by said device (6) so that the output of said square stage (INV) is connected to said second amplification stage (20) when said new enable signal (Ens) is high or so that the output of said square stage (INV) is connected to a terminal of a second resistor (Rf1) which has the other terminal connected to the inverting node of said integrator stage (O1, C1, Ri) in the case where said new enable signal (Ens) is low.
20
25
30
7. Apparatus according to claim 5, **characterized in that** the output signal of said second amplification stage (20) is the output square wave signal (Vo) of said apparatus.
35
8. Apparatus according to claim 1, **characterized in that** said input square wave signal (C) has a duty-cycle of 50%.
40

45

50

55

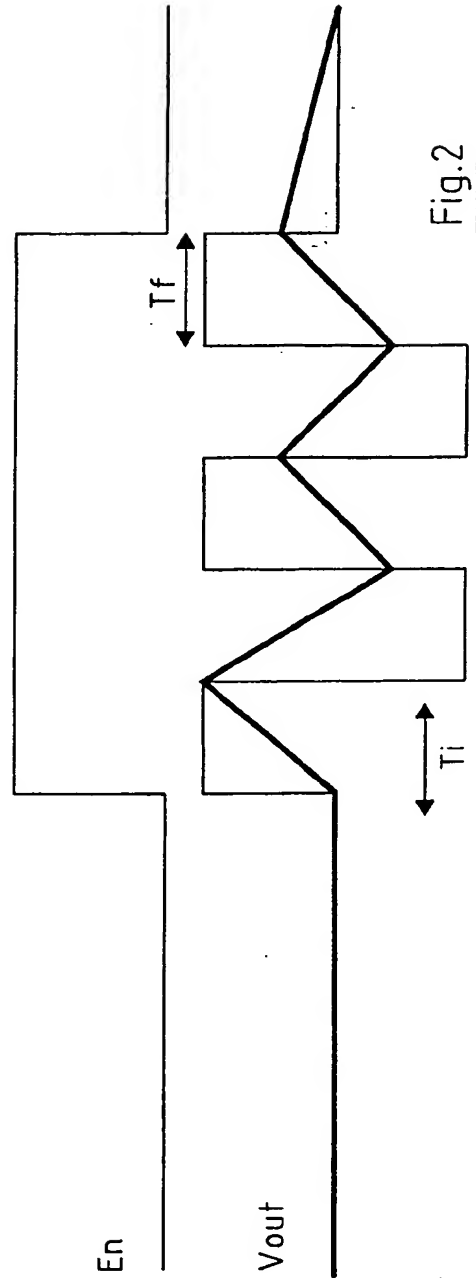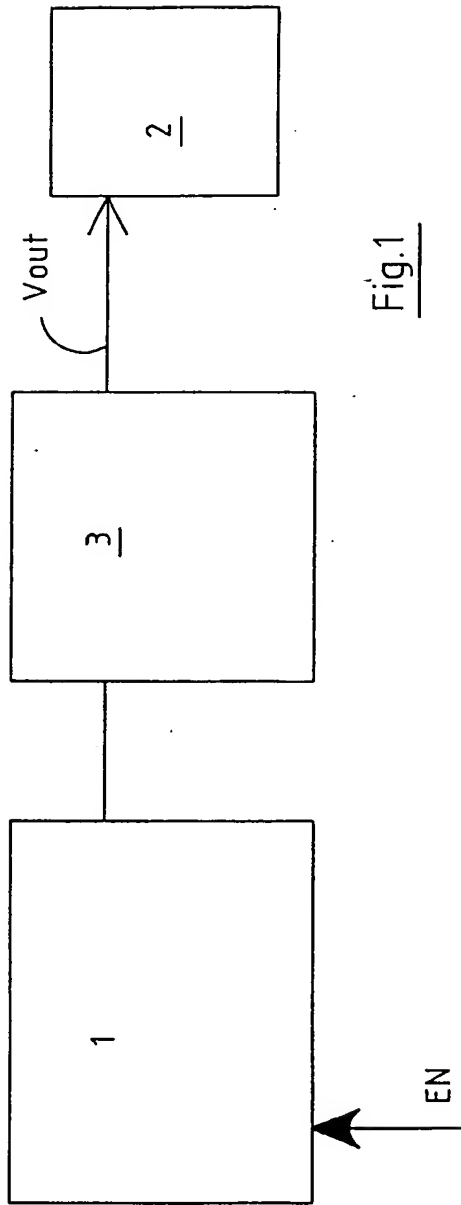

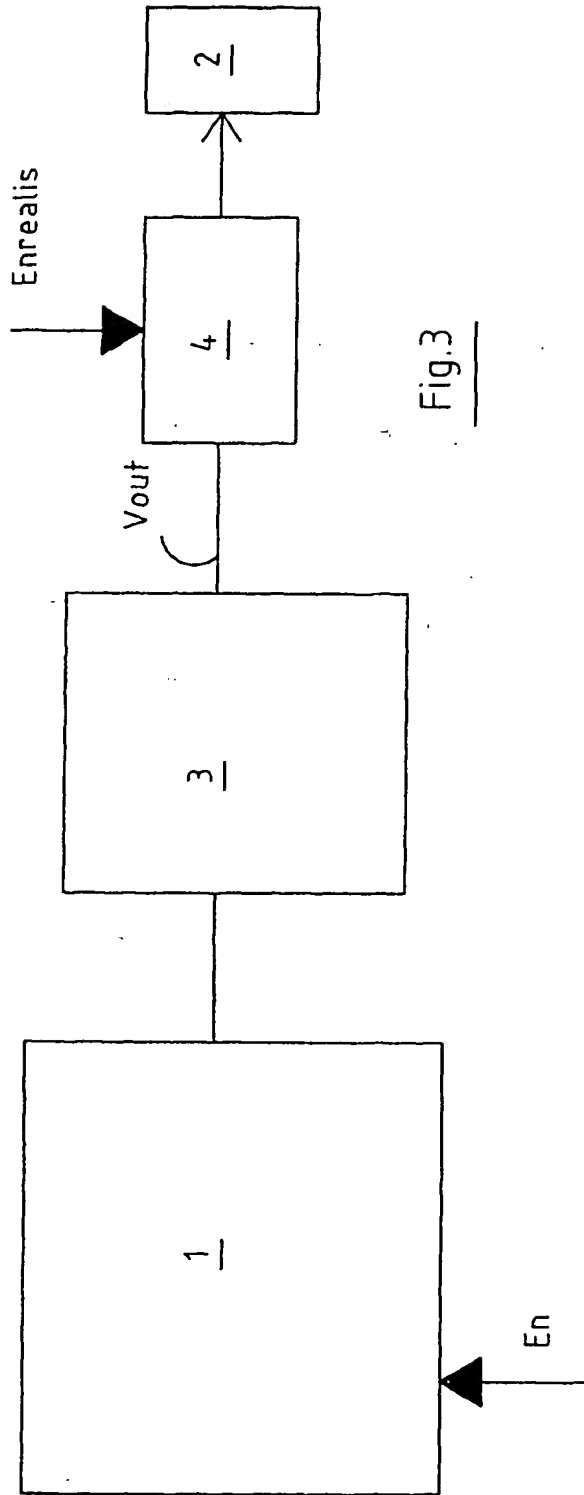


Fig. 3

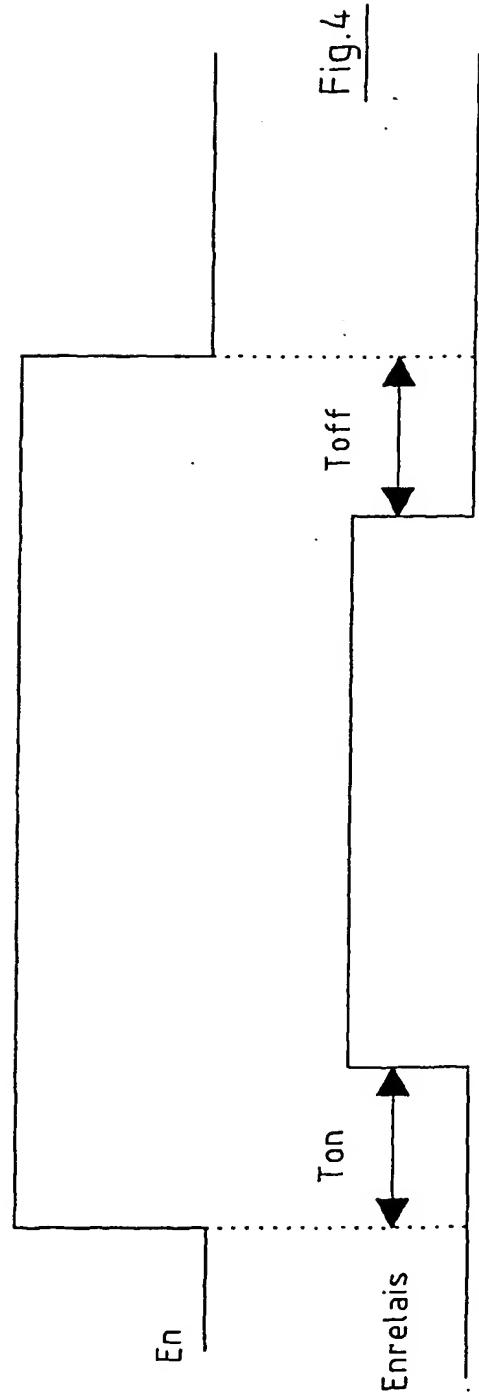


Fig. 4

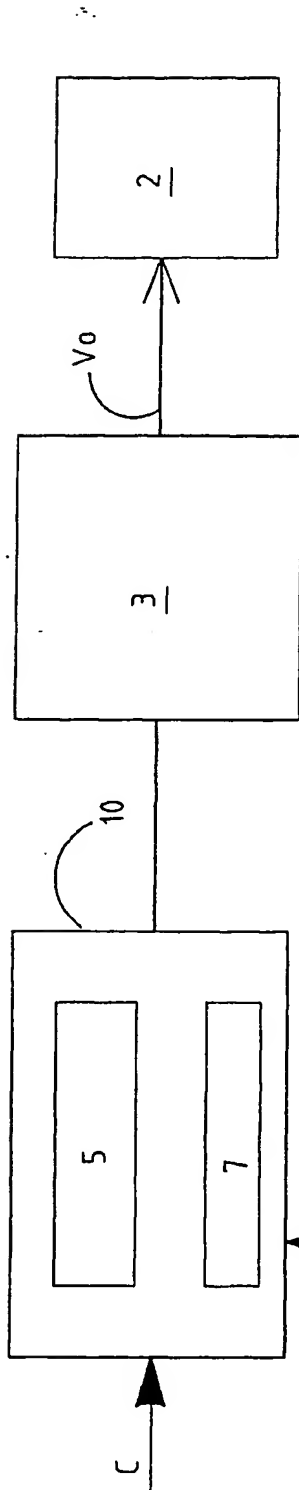


Fig. 5

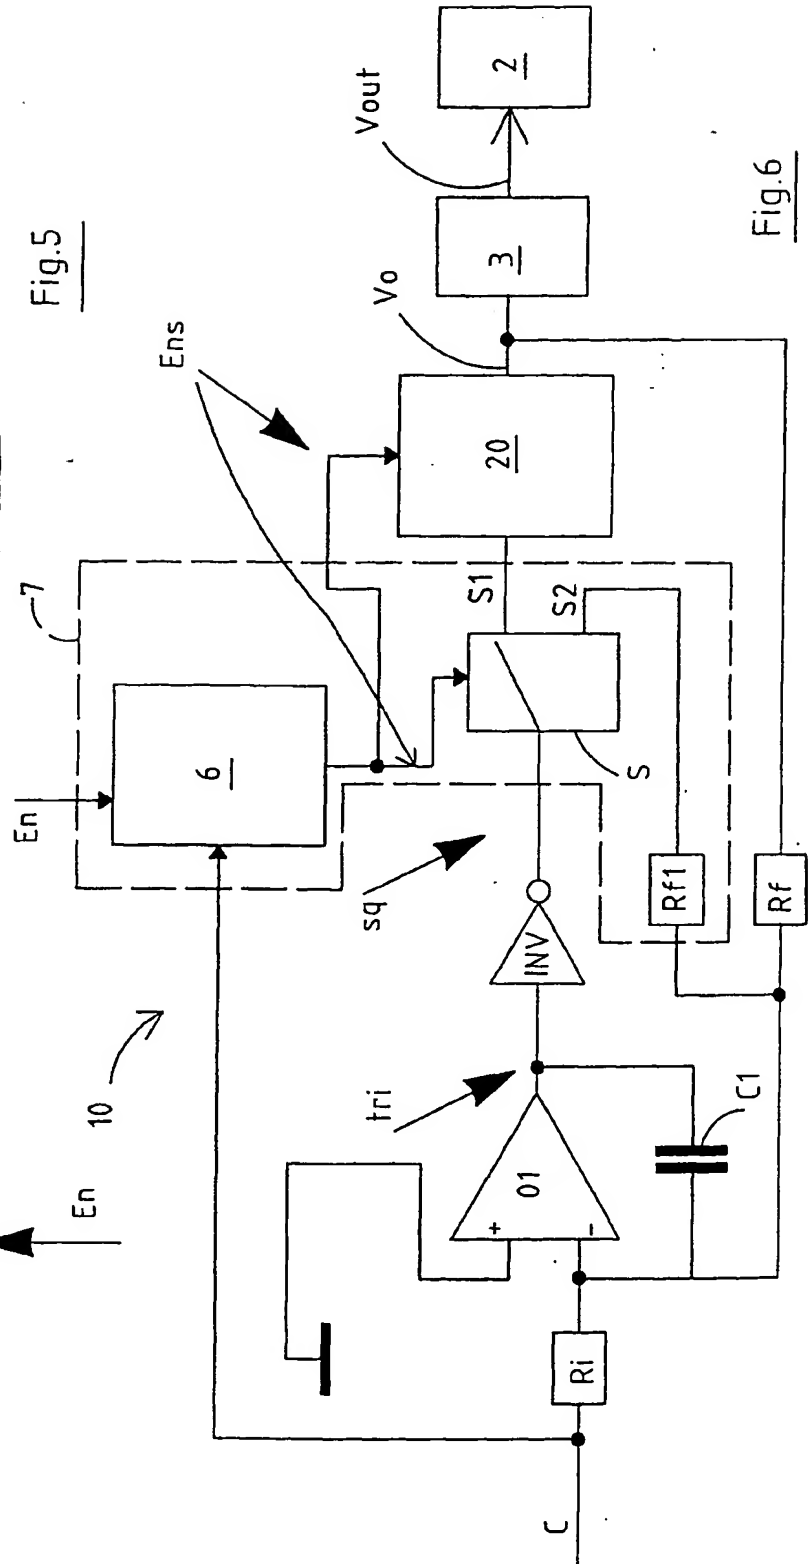


Fig. 6

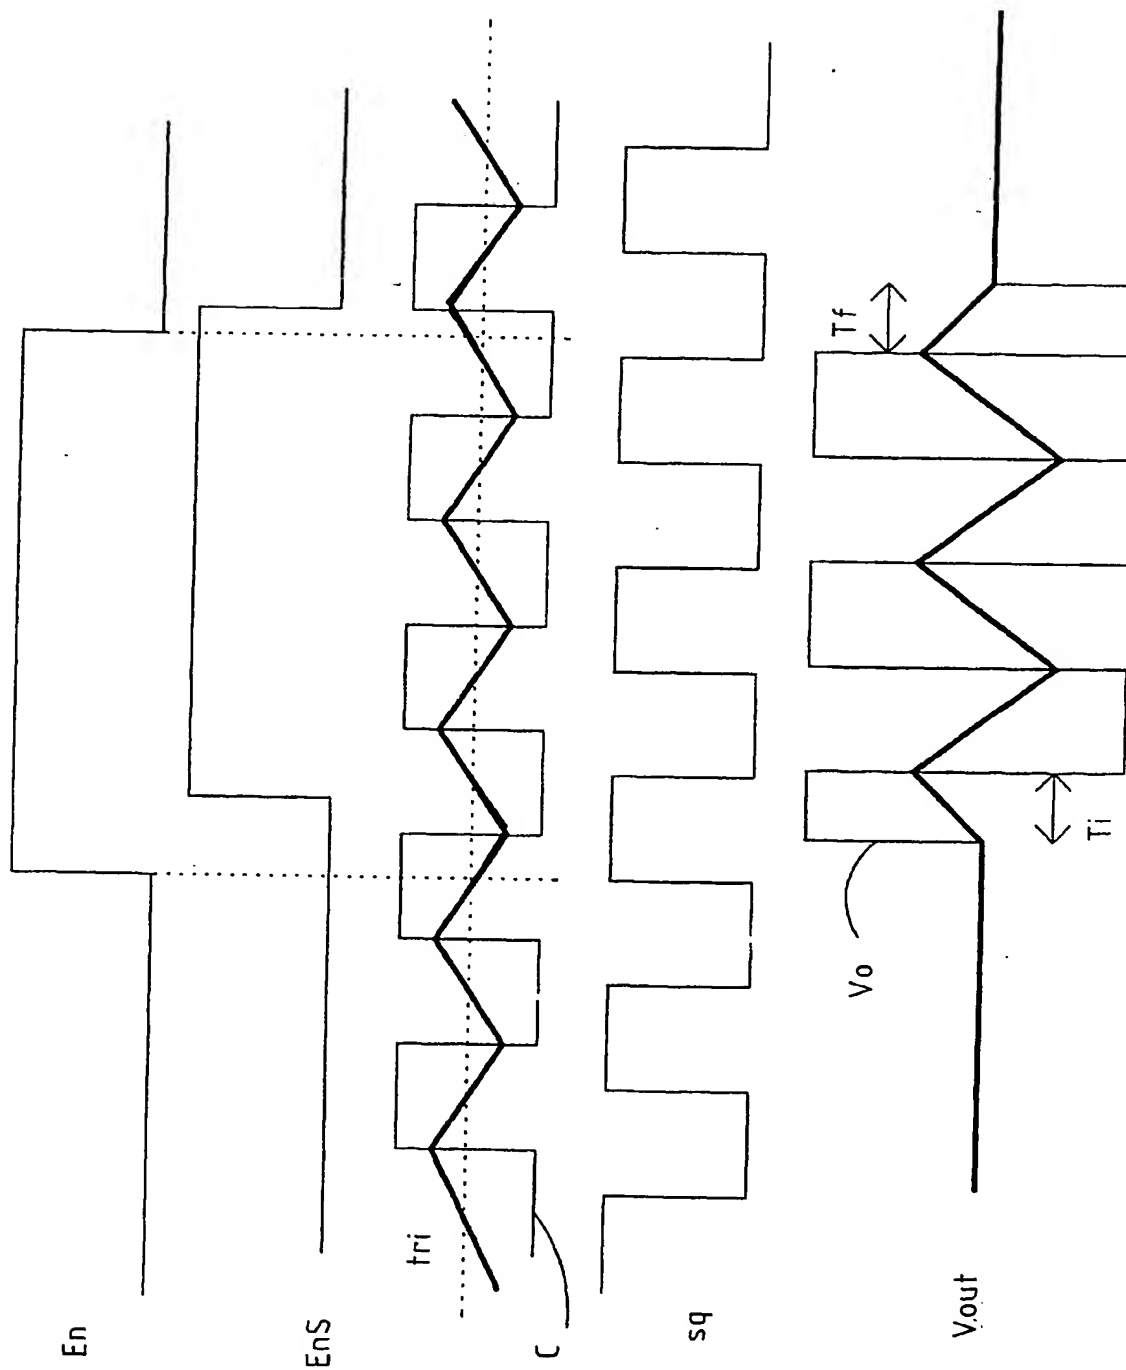


Fig.7

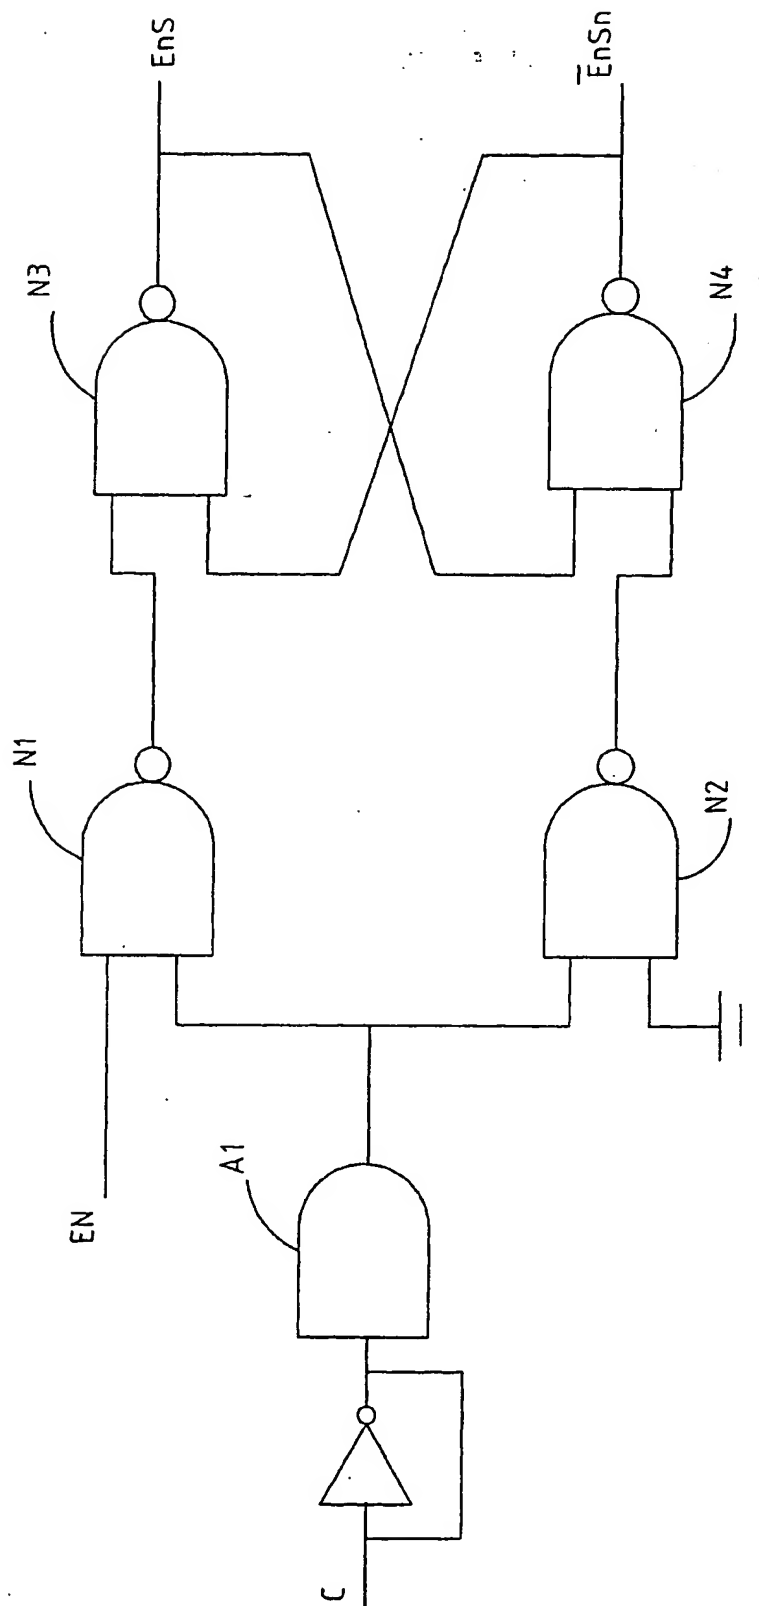


Fig.8



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 83 0589

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 503 571 A (MATSUSHITA ELECTRIC IND CO LTD) 16 September 1992 (1992-09-16) * page 8, line 43 - page 9, line 56; figures 7,8,11,12 *	1-4,8	H03F3/217 H03F1/30
Y	* page 10, line 1 - line 19; figure 14 *	5-7	
Y	EP 0 817 371 A (HARRIS CORP) 7 January 1998 (1998-01-07) * column 4, line 31 - column 5, line 15; figure 4 *	5-7	
A	WO 98 44626 A (NIELSEN KARSTEN) 8 October 1998 (1998-10-08) * abstract; figures 3-5 *	1	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
			H03F
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 8 February 2001	Examiner Tyberghien, G
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons B : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 83 0589

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

08-02-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0503571 A	16-09-1992	JP 4281606 A	07-10-1992
		DE 69229973 D	21-10-1999
		DE 69229973 T	27-04-2000
		US 5262733 A	16-11-1993
EP 0817371 A	07-01-1998	US 5805020 A	08-09-1998
		CN 1175821 A	11-03-1998
		JP 10065455 A	06-03-1998
		TW 381371 B	01-02-2000
WO 9844626 A	08-10-1998	AU 6495098 A	22-10-1998
		CN 1251697 T	26-04-2000
		EP 1042865 A	11-10-2000

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.